

# Module 5

## Broadcast Communication Networks

# Lesson 1

## Network Topology

## Specific Instructional Objectives

At the end of this lesson, the students will be able to:

- Specify what is meant by network topology
- Classify different Network topologies
- Categorize various Network topologies
- Explain the characteristics of the following topologies:
  - Mesh
  - Bus
  - Star
  - Ring
  - Tree
  - Unconstrained

### 5.1.1 Introduction

Topology refers to the way in which the network of computers is connected. Each topology is suited to specific tasks and has its own advantages and disadvantages. The choice of topology is dependent upon type and number of equipment being used, planned applications and rate of data transfer required, response time, and cost. Topology can also be defined as the *geometrically interconnection pattern* by which the stations (nodes/computers) are connected using suitable transmission media (which can be point-to-point and broadcast). Various commonly used topologies are discussed in the following sections.

### 5.1.2 Mesh Topology

In this topology each node or station is connected to every other station as shown in Fig. 5.1.1. The key characteristics of this topology are as follows:

Key Characteristics:

- Fully connected
- Robust – Highly reliable
- Not flexible
- Poor expandability




Figure 5.1.1 Mesh Topology

Two nodes are connected by dedicated point-point links between them. So the total number of links to connect  $n$  nodes =  $n(n-1)/2$ ; which is proportional to  $n^2$ . Media used for the connection (links) can be twisted pair, co-axial cable or optical fiber. With this topology there is no need to provide any additional information, that is from where the packet is coming, along with the packet because two nodes have a point-point dedicated

link between them. And each node knows which link is connected to which node on the other end.

Mesh Topology is not flexible and has a poor expandability as to add a new node  $n$  links have to be laid because that new node has to be connected to each of the existing nodes via dedicated link as shown in Fig. 5.1.2. For the same reason the cost of cabling will be very high for a larger area. And due to these reasons this topology is rarely used in practice.

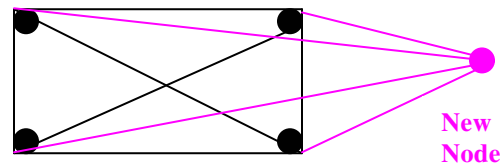


Figure 5.1.2 Adding a new node in Mesh Topology

### 5.1.3 Bus Topology

In Bus Topology, all stations attach through appropriate hardware interfacing known as a *tap*, directly to a linear transmission medium, or bus as shown in Fig. 5.1.3. Full-duplex operation between the station and the tap allows data to be transmitted onto the bus and received from the bus. A transmission from any station propagates the length of the medium in both directions and can be received by all other stations. At each end of the bus there is a *terminator*, which absorbs any signal, preventing reflection of signal from the endpoints. If the terminator is not present, the endpoint acts like a mirror and reflects the signal back causing interference and other problems.

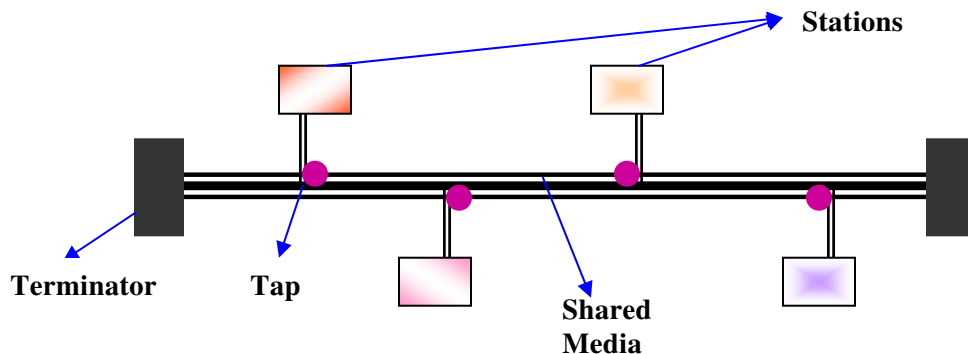


Figure 5.1.3 Bus Topology

Key Characteristics of this topology are:

- Flexible
- Expandable
- Moderate Reliability
- Moderate performance

A shared link is used between different stations. Hence it is very cost effective. One can easily add any new node or delete any node without affecting other nodes; this makes this topology easily expandable. Because of the shared medium, it is necessary to provide

some extra information about the desired destination, i.e. to explicitly specify the destination in the packet, as compared to mesh topology. This is because the same medium is shared among many nodes. As each station has a unique address in the network, a station copies a packet only when the destination address of the packet matches with the self-address. This is how data communications take place among the stations on the bus.

As there are dedicated links in the mesh topology, there is a possibility of transferring data in parallel. But in bus topology, only one station is allowed to send data at a time and all other stations listen to it, as it works in a broadcast mode. Hence, only one station can transfer the data at any given time. Suitable medium access control technique should be used so as to provide some way to decide “who” will go next to send data? Usually a distributed medium access control technique, as discussed in the next lesson, is used for this purpose.

As the distance through which signal traverses increases, the attenuation increases. If the sender sends data (signal) with a small strength signal, the farthest station will not be able to receive the signal properly. While on the other hand if the transmitter sends the signal with a larger strength (more power) then the farthest station will get the signal properly but the station near to it may face over-drive. Hence, delay and signal unbalancing will force a maximum length of shared medium, which can be used in bus topology.

### 5.1.4 STAR Topology

In the star topology, each station is directly connected to a common central node as shown in Fig. 5.1.4. Typically, each station attaches to a central node, referred to as the *star coupler*, via two point-to-point links, one for transmission and one for reception.

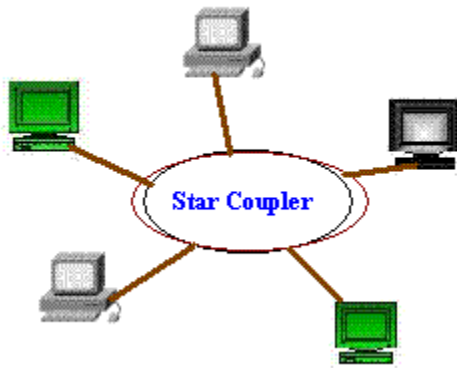


Figure 5.1.4 Star Topology

Key features:

- High Speed
- Very Flexible
- High Reliability
- High Maintainability

In general, there are two alternatives for the operation of the central node.

- One approach is for the central node to operate in a broadcast fashion. A transmission of a frame from one station to the node is retransmitted on all of the

[Click here to download full PDF material](#)